


**ENERGIZER NO. L91**

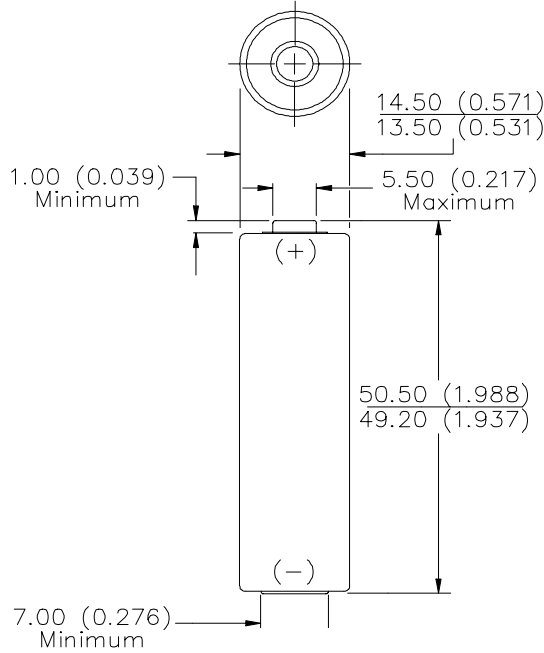

**Chemical System:** Lithium  
Lithium/Iron Disulfide (Li/FeS<sub>2</sub>)

**Designation:** ANSI-15LF, IEC-FR6

**Battery Voltage:** 1.5 Volts

**Average Weight:** 14.5 grams (0.5 oz.)

**Volume:** 8.0 cubic centimeters (0.5 cubic inch)

**Storage Temp:** -40°C to 60°C (-40°F to 140°F)

**Operating Temp:** -40°C to 60°C (-40°F to 140°F)

**Average Capacity:** 3000 mAh (to 1.0 volts)  
(Rated capacity at 200 mA drain.)


**Max Discharge:** 2 Amps Continuous  
3 Amps Pulse (2 seconds max)

**Lithium Content:** Less than 1 gram (0.04 oz.) per cell


**Jacket:** Non-magnetic Plastic Label

**Transportation:** Meets requirements of 49CFR 173.185 (b)


**CONSTANT CURRENT DISCHARGE**  
Typical Service

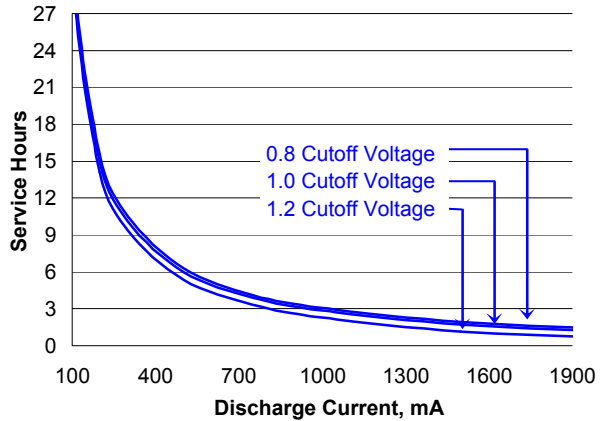

**CONSTANT POWER DISCHARGE**  
Continuous @ 20°C to 0.9 volts

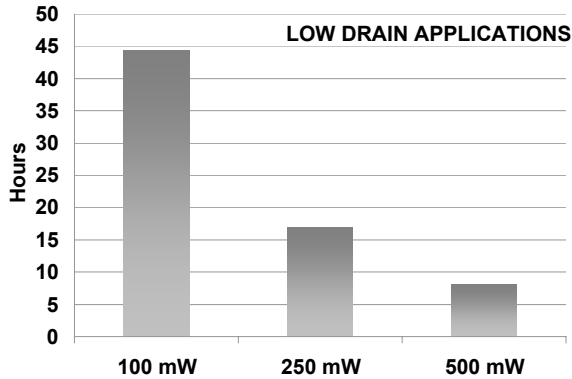



**CONSTANT POWER DISCHARGE**  
Continuous @ 20°C to 1.0 volts

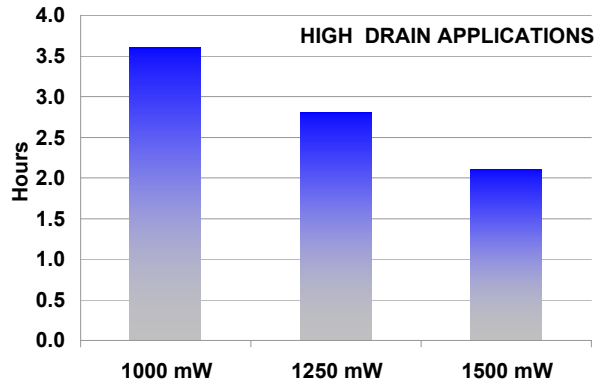









**ENERGIZER NO. L91**

**Temperature Effects**

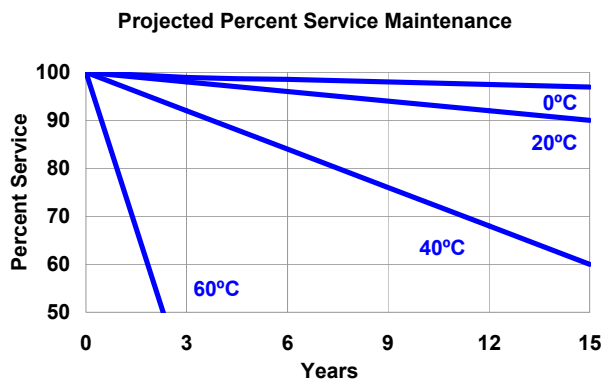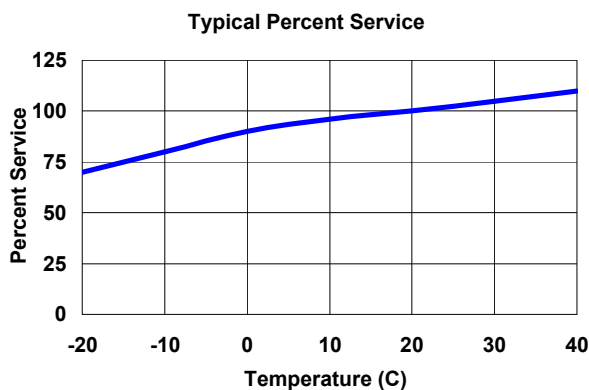

**Industry Standard Tests @ 20° C**

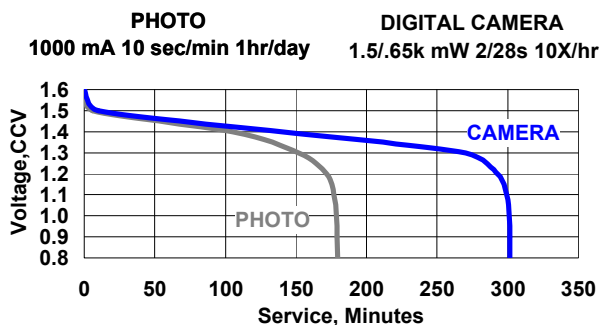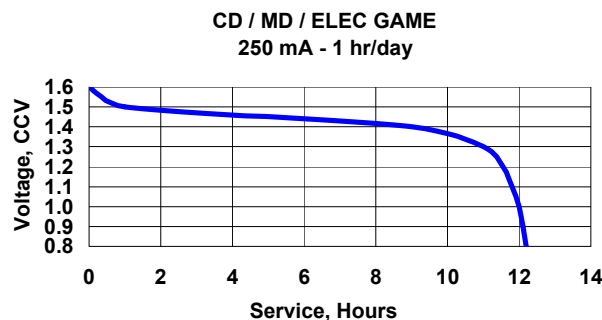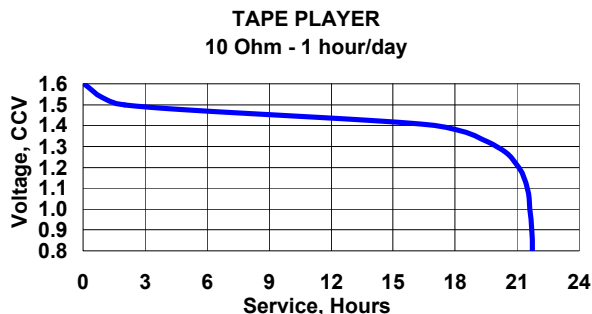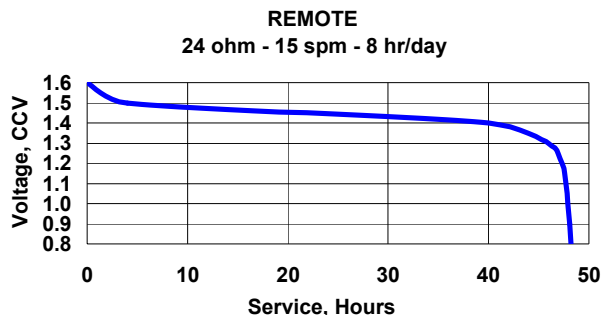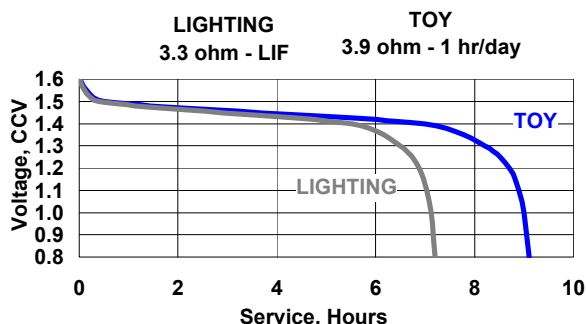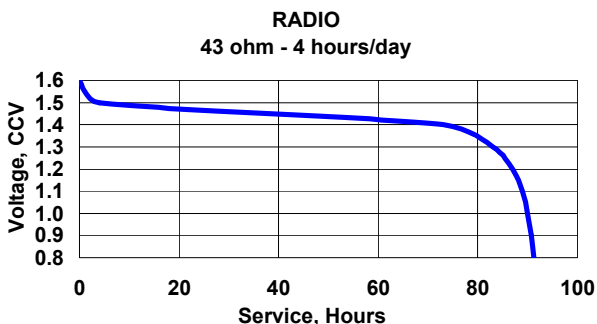

**Important Notice**

This data sheet contains information specific to batteries manufactured at the time of its publication.

**Contents herein do not constitute a warranty.**

© Energizer - All Rights Reserved