




PANDUIT PART NO. *	NOMINAL BUNDLE DIAMETER	MAXIMUM RECOMMENDED BUNDLE DIAMETER	DIMENSIONS			WEIGHT lbs / 100 ft. (g)
			"A" (in)	"B" (in)	"C" (in)	
PW50- - - - (Y)	0.50 (12.70)	0.55 (13.97)	0.47 (11.94)	0.125 (3.18)	0.032 (0.81)	2.01 (910.00)
PW75- - - - (Y)	0.75 (19.05)	0.81 (20.57)	0.72 (18.29)		0.035 (0.89)	2.87 (1301.81)
PW100- - - - (Y)	1.00 (25.40)	1.125 (28.58)	0.81 (20.57)		0.040 (1.02)	4.47 (2027.61)
PW150- - - - (Y)	1.50 (38.10)	1.625 (41.28)	1.125 (28.58)		0.042 (1.07)	7.65 (3469.91)

* 1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.

2. DIMENSION ⁰⁰ A IS STATIC INSIDE DIAMETER.
DIMENSION ⁰⁰ B IS WIDTH OF BREAKOUT SLOTS.
DIMENSION ⁰⁰ C IS WALL THICKNESS.

3. PANWRAP IS OFFERED IN THE FOLLOWING MATERIAL:
SAMPLE PART NUMBER:

PW75FR-CO

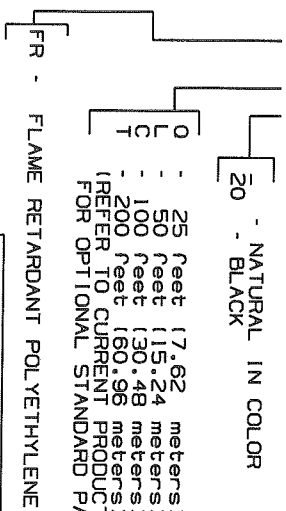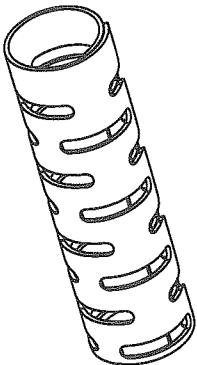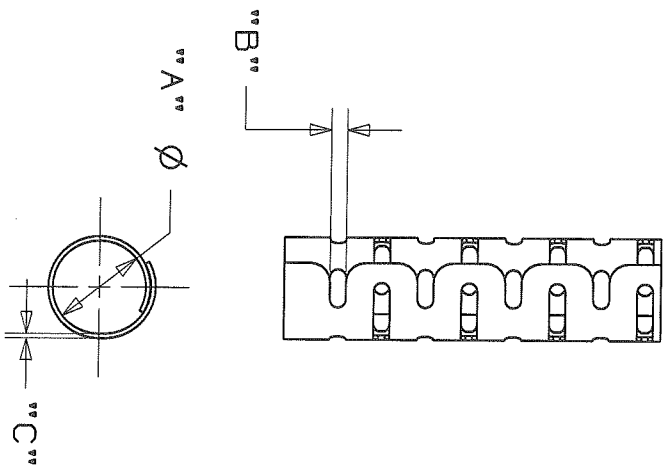

FR - FLAME RETARDANT POLYETHYLENE

DIMENSIONS IN BRACKETS ARE METRIC (mm)

CAD FILENAME/LAYERS

G02508BK_PB_PANWRAP-FR_01

PANDUIT

TINLEY PARK, ILLINOIS

PAN-WRAP

(PW) FR- (Y))

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.XX) ± 0.05 (1.3) (.XXX) ± 0.010 (0.25)
(.XX) ± 0.02 (0.5) ANGLES $\pm 5^\circ$

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJ.

DRAWN BY
JAD

3

SCALE
NONE

DATE 1/3/2004

SEE NOTE 3

GBZ508BK

A
SIZE