

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



EVO connector set, B6 series, plastic housing, consisting of: 1407727, 1407728, 1407622, 1407619, 1407669, plastic housing

Your advantages

- Both contact insert PE sheets are connected by means of a metal frame integrated in the sleeve housing
- Metal inlays ensure leading PE contact with angled plugs
- Halogen-free plastic
- Marking label can be attached



Key Commercial Data

Packing unit	1 pc
GTIN	4 046356 777759
GTIN	4046356777759
Weight per Piece (excluding packing)	0.315 kg
Custom tariff number	85366990
Country of origin	Poland

Technical data

General

Number of positions	6+PE	
Туре	B6	
Connection method	Push-in connection	
Cable outlet	straight	
	lateral	

09/03/2019 Page 1 / 9



Technical data

General

Degree of protection for housing	IP66		
	12 (UL 50e)		
Connection method	Push-in connection		
Rated voltage (III/3)	500 V		
Rated surge voltage	6 kV		
Rated current 16 A			
Conductor cross section 0.14 mm² 2.5 mm² (with ferrule)			
Connection cross section AWG 26 14 (with ferrule)			
External cable diameter	7 mm 13 mm		
Ambient temperature (operation)	-40 °C 100 °C		
Length of the assembly cutout	52 mm		
Width of the assembly cutout	35 mm		
Housing material	PA		
Contact carrier material	PC		
Locking latch material	PA		
Integrated protective cover	Yes		

Standards and Regulations

Flammability rating according to UL 94	V0
, ,	1


Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings




Schematic diagram

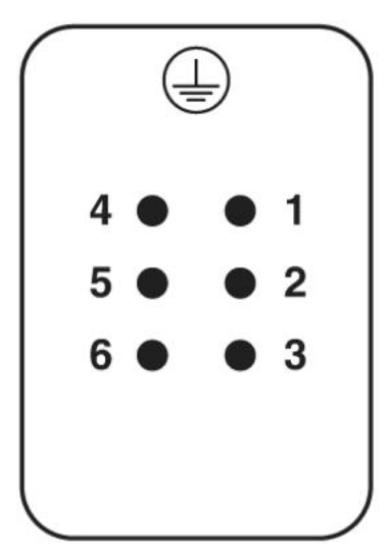

Pin assignment, connection side, pin




Schematic diagram

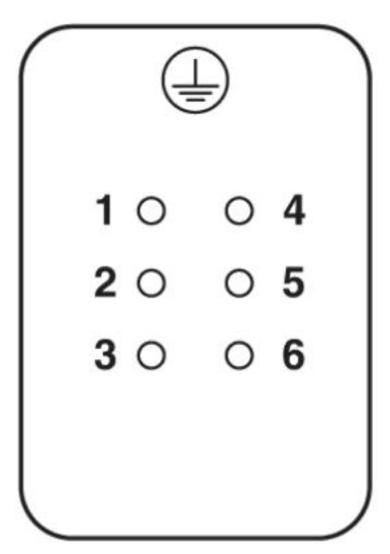

Pin assignment, connection side, socket




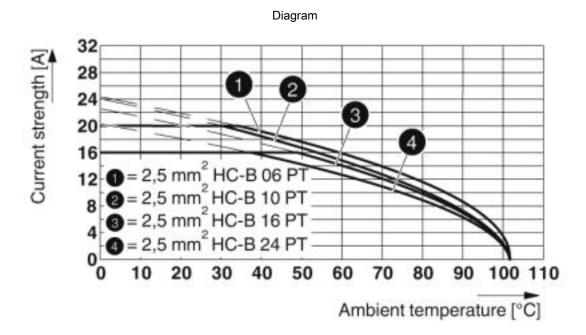

Derating diagram




Dimensional drawing

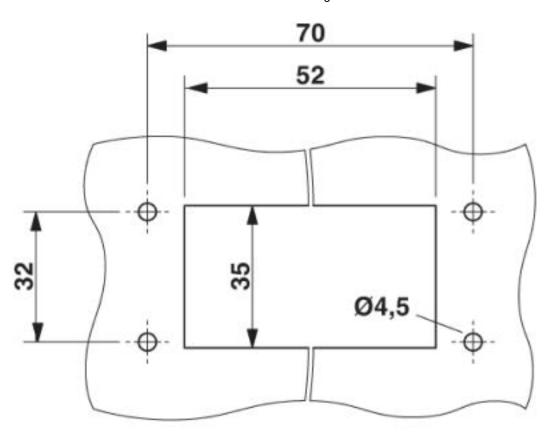

Mounting cutout

Dimensional drawing

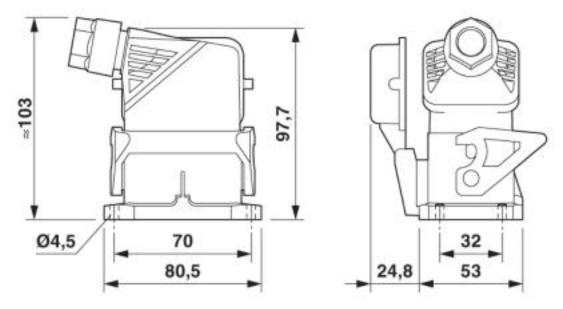

Dimensional drawing



Articles in set

Contact insert - HC-B06-I-PT-F - 1407727



HEAVYCON socket insert, B6 series, 6 + PE-pos., push-in connection

Contact insert - HC-B06-I-PT-M - 1407728



HEAVYCON pin insert, B6 series, 6 + PE-pos., push-in connection

Housing - HC-EVO-B06-BWSC-PLRBK - 1407622



HEAVYCON EVO panel mounting base, plastic, B6, with single locking latch, height: 30.5 mm, with flat gasket, with protective cover

Housing - HC-EVO-B06-HLFS-PLBK - 1407619



HEAVYCON EVO sleeve housing, plastic, with bayonet flange for EVO screw connection, B6, for single locking latch, height: 60.5 mm, without EVO screw connection

Cable gland - HC-B-G-M20-PLRBK - 1407669



EVO plastic cable gland with bayonet locking, for housing series B, size M20, cable diameter: 7 ... 13 mm

Classifications

eCl@ss

eCl@ss 4.0	27260700
eCl@ss 4.1	27260700



Classifications

eCl@ss

eCl@ss 5.0	27260700
eCl@ss 5.1	27260700
eCl@ss 6.0	27260700
eCl@ss 7.0	27440101
eCl@ss 8.0	27440101
eCl@ss 9.0	27440101

ETIM

ETIM 3.0	EC000438
ETIM 4.0	EC000437
ETIM 5.0	EC000437
ETIM 6.0	EC002636
ETIM 7.0	EC002636

UNSPSC

UNSPSC 6.01	30211923
UNSPSC 7.0901	39121522
UNSPSC 11	39121522
UNSPSC 12.01	39121522
UNSPSC 13.2	31261501

Approvals

Α	n	n	rc	V	a	ls

Approvals

EAC / EAC / DNV GL

Ex Approvals

Approval details

EAC	EAC	RU C- DE.Al30.B.01102
-----	-----	--------------------------

EAC-Zulassung



Approvals

DNV GL



https://approvalfinder.dnvgl.com/

TAE000037S

Accessories

Accessories

Device marking

Snap-in markers - US-EMP (20X9) - 0829439



Snap-in markers, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped into marker carrier, lettering field size: 20 x 9 mm

Housing latches

Single locking latch - HC-B06-SL-PLBK - 1407697



Replacement single locking latch for HEAVYCON EVO housing type B6, PA

Phoenix Contact 2019 © - all rights reserved http://www.phoenixcontact.com