

## Housing - HC-EVO-B10-HHFD-2B-PL-BK - 1411495

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Sleeve housing B10, for double locking latch, material: PA, cable outlets: 2, straight/lateral, height: 87.5 mm, cable gland: none, support sleeve: no, Standard

### Your advantages

- Flexible cable outlet direction, lateral or straight
- Lower costs than metal version
- Labeling option using 9 x 20 mm marking label
- Low weight
- Lower risk of condensation
- Both contact insert PE sheets are connected by means of a metal frame integrated in the sleeve housing
- Metal inlays ensure leading PE contact with angled plugs
- Completely corrosion-resistant
- Halogen-free plastic

### Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 932943
GTIN	4046356932943

### Technical data

#### Dimensions

Height	87.5 mm
--------	---------

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C (static)
---------------------------------	----------------------------

#### General

Note	for contact inserts HC-B10, BB18, DD42, M, K8/24, HV03
Type	B10
Flammability rating according to UL 94	V0

# Housing - HC-EVO-B10-HHFD-2B-PL-BK - 1411495

## Technical data

### General

Locking type	for double locking latch
Pg screw connection	none
Cable outlet	straight
	lateral
Housing material	PA
Ambient temperature (operation)	-40 °C ... 125 °C (static)

### Standards and Regulations


Flammability rating according to UL 94	V0
--	----

### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

## Drawings

Dimensional drawing

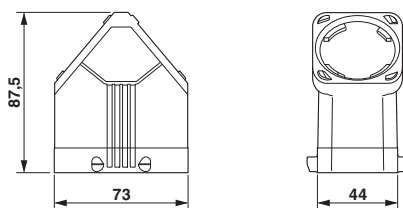

Dimensional drawing

## Approvals

Approvals

Approvals

GL / UL Recognized / cUL Recognized / EAC / cULus Recognized


Ex Approvals


### Approval details

GL		<a href="http://exchange.dnv.com/tari/">http://exchange.dnv.com/tari/</a>	6196614 HH
----	--	---	------------


## Housing - HC-EVO-B10-HHFD-2B-PL-BK - 1411495

### Approvals

UL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	E255026
---------------	---	---	---------

cUL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	E255026
----------------	---	---	---------

EAC			RU C- DE.AI30.B.01102
-----	---	--	--------------------------

cULus Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	
------------------	---	---	--

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>