

## Protective covers - HC-B24-BCSFD-P-BK - 1414630


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Protective cover B24, for double locking latch, protective cover material: PA, height: 18.5 mm, seal: no, diameter of retaining cord eyelet: 40 mm

RoHS

### Key Commercial Data

|              |   |
|--------------|---|
| Packing unit | 10 pc   |
| GTIN         | <br>4 055626 030814 |
| GTIN         | 4055626030814   |

### Technical data

#### Dimensions

|                                   |         |
|-----------------------------------|---------|
| Length                            | 124 mm  |
| Width                             | 46 mm   |
| Height                            | 18.5 mm |
| Diameter of retaining cord eyelet | 40 mm   |

#### Ambient conditions

|                                 |                   |
|---------------------------------|-------------------|
| Degree of protection (IP)       | IP66              |
| Ambient temperature (operation) | -20 °C ... 100 °C |

#### General

|  |  |
|--|--|
| Size                                   | B24  |
| Material                               | PA   |
| Flammability rating according to UL 94 | HB   |
| Color                                  | black  |
| Seal present                           | no   |
| Note                                   | Protective cover for supporting base element with double locking latch |
| Connection                             | Plastic protective cover for short-term protection                     |

### Standards and Regulations

## Protective covers - HC-B24-BCSFD-P-BK - 1414630

### Technical data

#### Standards and Regulations


|  |    |
|--|----|
| Flammability rating according to UL 94 | HB |
|--|----|

#### Environmental Product Compliance

|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

### Drawings

Dimensional drawing

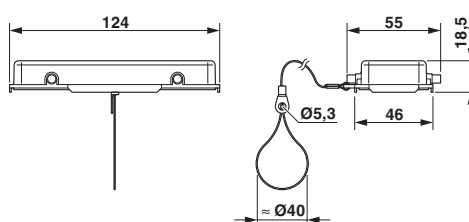

Dimensional drawing

### Approvals

#### Approvals

Approvals

EAC

Ex Approvals

#### Approval details

|     |            |                          |
|-----|------------|--------------------------|
| EAC | <b>EAC</b> | RU C-<br>DE.AI30.B.01102 |
|-----|------------|--------------------------|

Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>