

DC Connector, Socket, 6.0 mm, 2.00 mm, 2-pole, solder terminals for PCB



Description

- PCB Mounting:
Drop-in type, from rear-side
- Low Voltage DC Plug and Socket
- DC Plug: 2-pole, straight


Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Mating Connectors](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)


Technical Data

Diameter	6.0 mm / 2.0 mm	Allowable Operation Temp.	-20 °C to 70 °C
Number of Poles	2-pole	Terminal	PCB terminals tin-plated
Ratings DC	0.5A / 12VDC	Mounting	Drop-in type
Dielectric Strength	500VDC	Style	straight
Insulation Resistance	> 100 MΩ @ 500VDC	Lifetime	5000 Insertions

Dimensions

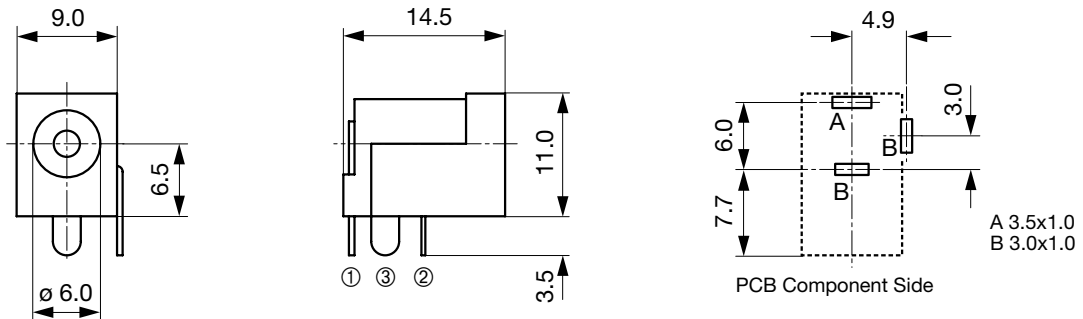

Diagrams



All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
DC Plug/Socket	6.0	2-pole	PCB terminals	4840.2201

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging unit 250 Pcs

Mating Inlets/Plugs

Category / Description

[DC Plug/Socket Overview complete](#)

DC Connector, Plug, 5.5x2.1 mm, 2-pole, solder terminal	4840.1200
---------------------------------------------------------	-----------

DC Connector, Plug, 5.5x2.1 mm, 2-pole, straight, with cable	4840.5200
--------------------------------------------------------------	-----------

DC Connector, Plug, 5.5x2.1 mm, 2-pole, angled, with cable	4840.5201
------------------------------------------------------------	-----------

[DC Plug/Socket further types to 4840 DC-Stecker, verschiedene](#)