

Ø18.20REF

2

PI

3

4

1

CONNECTOR KIT

OVERMOLD

CABLE

L

Ø7.6REF

P2

98.90REF

MATES WITH 2834005 SERIES

WIRING DIAGRAM		
PI	WIRE COLOR	P2
PI-1	RED	-
PI-2	WHITE	-
PI-3	BLACK	-
PI-4	BROWN	-

NOTES:
1.MATE WITH 2834005 SERIES.
2.RATINGS:
VOLTAGE:300V AC/DC
CURRENT:6A MAX.
TEMPERATURE:80°C

P/N	CABLE	DIM A	L (mm)
9-2834004-1	RUBBER (THERMOPLASTIC ELASTOMER TYPE)	Ø8.5	150±5
9-2834004-2			250±10
9-2834004-3			500±15
9-2834004-4			1000±15

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±-
1 PLC ±1.0
2 PLC ±0.5
3 PLC ±-
4 PLC ±-
ANGLES ±-
FINISH

MATERIAL

-

DWN SHI MING 10SEP2014
CHK SHI MING 10SEP2014
APVD XU XIANG 10SEP2014

PRODUCT SPEC
108-173041

APPLICATION SPEC
114-173041

WEIGHT
-

Customer Drawing

NAME
4P MALE CABLE ASSEMBLY

SIZE
A2

CAGE CODE
-

DRAWING NO
C=2834004

RESTRICTED TO
-


SCALE
NTS

SHEET
1

OF
2


REV
AI

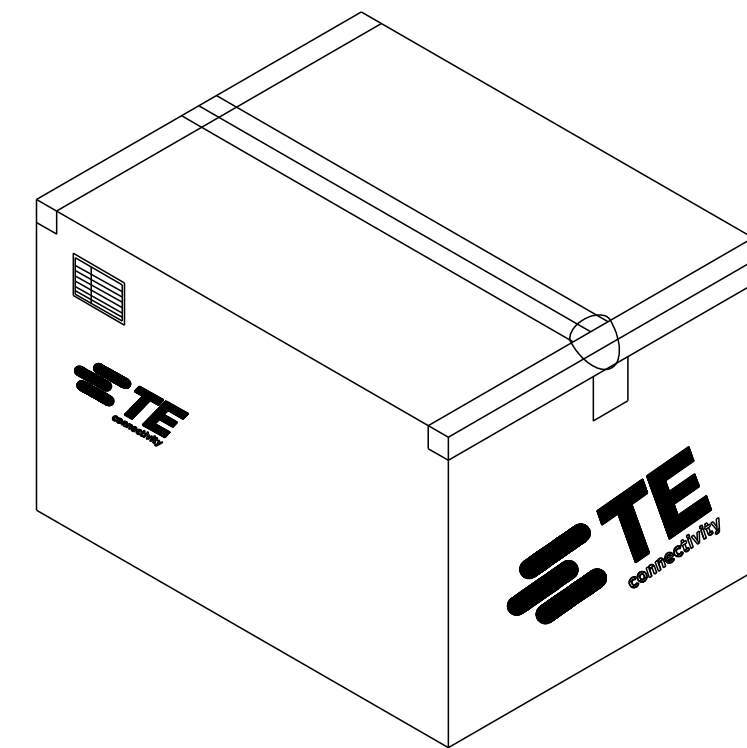

3. SEAL THE CARTON.



4. PACKAGING QUANTITIES (REFER SHEET 1 FOR PN DEFINITION):

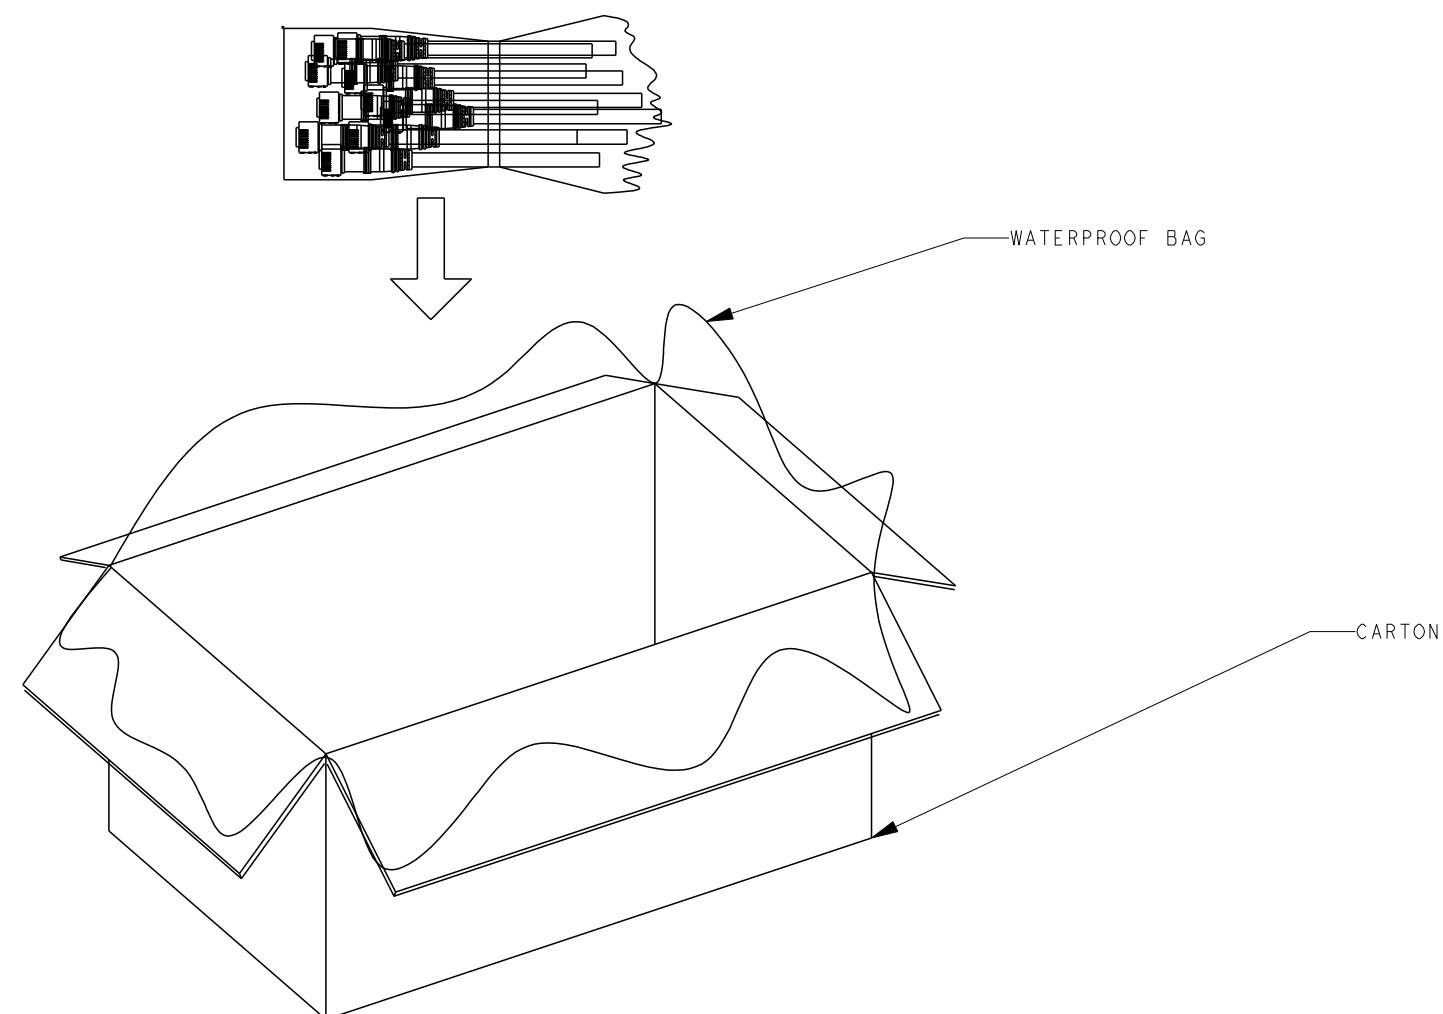P / N	PARTS PER CARTON (PCS)
9-2834004-1	400
9-2834004-2	260
9-2834004-3	90
9-2834004-4	60



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SHI MING 10SEP2014		 TE Connectivity	
		CHK SHI MING 10SEP2014			
		APVD XU XIANG 10SEP2014			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.0 1 PLC ±1.0 2 PLC ±0.5 3 PLC ±. 4 PLC ±. ANGLES ±. FINISH		NAME 4P MALE CABLE ASSEMBLY - -	
		PRODUCT SPEC 108-173041 APPLICATION SPEC 114-173041		SIZE A2	
MATERIAL -		WEIGHT -		CAGE CODE -	
		CUSTOMER DRAWING Customer Drawing		DRAWING NO C-2834004	
				RESTRICTED TO -	
				SCALE NTS	
				SHEET 2 OF 2	
				REV A1	