

202A111 to 196


Straight boot




Applications

Use for mechanical protection and connector/cable strain relief. This family of boots has no lip, so that a boot can be installed directly onto the connector accessory thread.

As supplied (a)

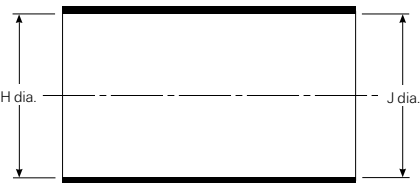

After unrestricted recovery (b)

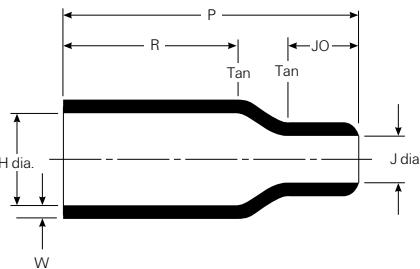

Available in:

Americas

Europe

Asia Pacific



Fax-on-demand

US only (800) 260-9099

Outside US (650) 257-2301

Fax ID

3101

Description

SCD

Visit our website at www.tycoelectronics.com**Materials available**

Material*	Material description	Precoating no.	Adhesive part no.**
-3	Semirigid polyolefin	/42 or /86	S-1017 or S-1048
-4	Flexible polyolefin	/42 or /86	S-1017 or S-1048
-12	Viton	N/A	S-1255-04
-25	Fluid-resistant elastomer	/42 or /86 or /225	S-1017 or S-1048 or S-1125
-100	Polyolefin, Zerohal	/86 or /180	S-1030 or S-1048

*For more information, please see the appropriate material page in this section.

**For more information, please see Section 5 of this catalog.

Product dimensions (mm/in)

Part number	H			J		
	Min.	Min.	Max.	Min.	Min.	Max.
	-3, -4, -25	-12, -100		-3, -4, -25	-12, -100	
	a	a	b	a	a	b
202A111	16.5 (.65)	16.5 (.65)	7.9 (.31)	16.5 (.65)	11.9 (.47)	3.8 (.15)
202A121	24.6 (.97)	22.6 (.89)	9.9 (.39)	24.6 (.97)	17.8 (.70)	5.3 (.21)
202A132	28.4 (1.12)	26.2 (1.03)	14.2 (.56)	28.4 (1.12)	20.3 (.80)	6.6 (.26)
202A142	31.0 (1.22)	31.0 (1.22)	17.8 (.70)	31.0 (1.22)	25.4 (1.00)	7.4 (.29)
202A153	36.1 (1.42)	36.1 (1.42)	21.9 (.86)	36.1 (1.42)	26.2 (1.03)	8.6 (.34)
202A163	42.7 (1.68)	42.7 (1.68)	27.4 (1.08)	42.7 (1.68)	27.2 (1.07)	9.4 (.37)
202A174	51.8 (2.04)	48.3 (1.90)	35.3 (1.39)	51.8 (2.04)	48.3 (1.90)	16.0 (.63)
202A185	66.0 (2.60)	66.0 (2.60)	43.7 (1.72)	66.0 (2.60)	54.1 (2.13)	19.6 (.77)
202A196	86.4 (3.40)	86.4 (3.40)	57.2 (2.25)	86.4 (3.40)	71.4 (2.81)	26.9 (1.06)

	P	R	JO	W
	±10%	±10%	Ref.	±20%
	b	b	b	b
202A111	25.4 (1.00)	14.2 (.56)	5.8 (.23)	1.27 (.05)
202A121	38.1 (1.50)	21.8 (.86)	9.1 (.36)	1.52 (.06)
202A132	51.3 (2.02)	27.9 (1.10)	13.0 (.51)	1.78 (.07)
202A142	66.8 (2.63)	35.6 (1.40)	17.8 (.70)	1.78 (.07)
202A153	73.7 (2.90)	41.4 (1.63)	16.0 (.63)	1.78 (.07)
202A163	99.1 (3.90)	62.7 (2.47)	18.0 (.71)	2.03 (.08)
202A174	130. (5.13)	64.8 (2.55)	41.9 (1.65)	3.30 (.13)
202A185	161.3 (6.35)	90.2 (3.55)	47.8 (1.88)	3.81 (.15)
202A196	212.6 (8.37)	113.0 (4.45)	62.2 (2.45)	4.06 (.16)

Note: Coating is optional. As supplied dimensions appearing in table are for uncoated parts. When coating is added, entry diameters will be reduced by 1.5 mm (.06") max.

Users should independently evaluate the suitability of the product for their application.
 Before ordering check with factory for most current data.