


		Shall Accommodate Cable with Dimensions		
	H min	øE max	øF min	øD max
2.65 (0.105)	8.25 (0.325)	2.65 (0.105)	0.90 (0.035)	1.9 (0.075)
3.55 (0.140)	8.25 (0.325)	3.55 (0.140)	1.40 (0.055)	2.65 (0.105)
5.00 (0.195)	8.25 (0.325)	5.00 (0.195)	2.15 (0.085)	4.30 (0.170)
6.45 (0.255)	8.25 (0.325)	6.45 (0.255)	3.30 (0.130)	5.95 (0.235)
7.6 (0.300)	8.25 (0.325)	7.6 (0.300)	4.30 (0.170)	7.00 (0.275)

ation cross-linked modified polyvinylidene fluoride.
TOR:

kel 40.
provide an e and termination on cables, rated for 150 C minimum, meeting the
, having nickel
C to +175 C.
-approved convection in accordance with Raychem process standard RCPS-100-70.
recommended for use w

prepare the cable as shown:

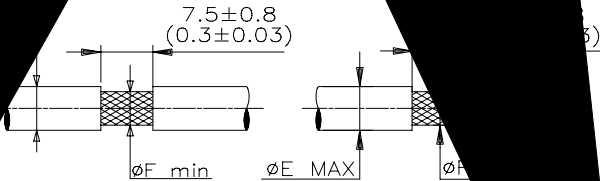

7.5±0.8
(0.3±0.03)

øF min øE MAX øF

emark of Raychem Corporation.

Raychem		THERMOFIT DEVICES		Raychem Corporation 300 Constitution Drive Menlo Park, CA 94025 USA		E: SOLDERSLEEVE* DEVICE SHIELD TERMINATION WITH BRAID HIGH TEMPERATURE							
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.						DOCUMENT NO.: SO96-X-01-100							
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A		ANGLES: N/A ROUGHNESS IN MICRON		Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DOCUMENT NUMBER: D981095		REPLACES: SO9601					
DRAWN BY: M. FORONDA		DATE: 06/29/98		PROD. REV. SEE TABLE		DOC ISSUE: 1		SCALE: None		SIZE: A		SHEET: 1 of 1	

If this document is printed it becomes uncontrolled. Check for the latest revision.