
INNOVATOR IN ELECTRONICS

Product Search Data Sheet

TZB4Z030AB10R00

In Production Recommended RoHS REACH

Appearance & Shape



Note: This datasheet may be out of date.

Please download the latest datasheet of TZB4Z030AB10R00 from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-us/products/productdetail?partno=TZB4Z030AB10R00



- 1. Miniature rectangular shape: 4.0(W)x4.5(L)x3.0(H)mm.
- 2. Color coded case facilitates identification of capacitance range.
- 3. Designed for automatic placement in surface mount applications.
- 4. Designed to withstand flux baths and solder baths (with cover film type).
- 5. Can be temporarily attached to PCB with adhesives (Terminal style Aand B).
- 6. Can be reflow and flow (with cover film type) soldering method.
- 7. Stable characteristics over a wide frequency range. (Resonant frequency: 1000MHz min. / 6pF)

Packaging Information

| Packaging | Specifications | Minimum Order Quantity |
|-----------|---------------------|---------------------------|
| R00 | 180mm Embossed Tape | 500 |

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



Product Search Data Sheet

Note: This datasheet may be out of date

Please download the latest datasheet of TZB4Z030AB10R00 from the official website of Murata Manufacturing

Co., Ltd. http://www.murata.com/en-us/products/productdetail?partno=TZB4Z030AB10R00

TZB4Z030AB10R00

Specifications

| Shape | SMD | |
|-----------------------------|--------------------------|--|
| Operating Temperature Range | -25℃ to 85℃ | |
| Thickness | 3mm | |
| Thickness Tolerance | ±0.2 | |
| Rated Voltage | 100Vdc | |
| Cmin.(max.) | 1.4pF | |
| Cmax. | ЗрF | |
| Adjustment Direction | Тор | |
| Soldering Method | Reflow Soldering Iron | |
| тс | NP0±200ppm/°C | |
| Q | 300min. at 1MHz, Cmax. | |
| Withstanding Voltage | 220Vdc | |
| Insulation Resistance(min.) | 10000ΜΩ | |
| Torque | 1.5 to 9.8mNm | |
| Stator/Case Color | Brown | |
| Mass | 0.15g | |

2 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. 2.This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering

Product Search Data Sheet




Please download the latest datasheet of TZB4Z030AB10R00 from the official website of Murata Manufacturing <u>Co., Ltd.</u> http://www.murata.com/en-us/products/productdetail?partno=TZB4Z030AB10R00

Note: This datasheet may be out of date

TZB4Z030AB10R00



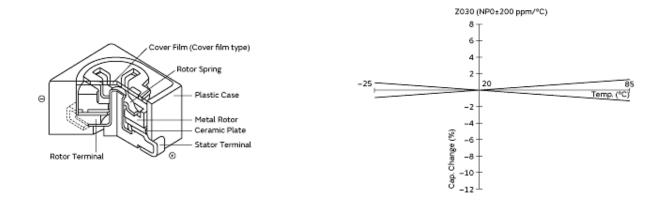

Constructions

Temp. Coeff. Characteristics

Attention

This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

3 of 3