

# IP67 SEALED CIRCULAR PLASTIC CONNECTOR

TE Connectivity (TE) IP67 Sealed Circular Plastic Connector is designed for power & signal wire-to-wire connection systems in a wide range of harsh environment applications. The connector is IP67/68 rated enabling it to withstand the harshest environments. It features a pre-positioned 1/4 turn coupling ring with positive lock and alignment features helping ease of installment. It's unique contact pattern for each position size helps prevent accidental mating with other position sizes.



## Applications

- Outdoor LED lighting
- Architectural lighting

## Electrical

- Operating current: 7A (2P), 6A (3P & 4P)
- Operating voltage: 300 VAC Max
- Dielectric withstanding voltage: 1600 VAC

## Mechanical

- Operating temperature: -25°C to +80°C
- 30 Cycles Durability

## Product Specifications

- Application specifications: 114-137041
- Product specifications: 108-137041

## Materials

- Housing: 94V0 rated high temperature resistant thermoplastic
- Contact : Tin over nickel plated copper alloy


## Key Benefits

- Achieve a high level water proof solution with IP67 to IP68 rating
- Save space with a compact circular design
- Help prevent accidental mating with a unique contact pattern for each position sizes
- Help improve assembly through pre-positioned 1/4 turn coupling ring with positive lock and alignment features
- Secure engagement through a clear locking sound when connection occurs

Product Selection Information

Part Number	Description
<a href="#">9-2834000-1</a>	2P MALE CABLE ASSEMBLY
<a href="#">9-2834001-1</a>	2P FEMALE CABLE ASSEMBLY
<a href="#">9-2834002-1</a>	3P MALE CABLE ASSEMBLY
<a href="#">9-2834003-1</a>	3P FEMALE CABLE ASSEMBLY
<a href="#">9-2834004-1</a>	4P MALE CABLE ASSEMBLY-150MM
<a href="#">9-2834005-1</a>	4P FEMALE CABLE ASSEMBLY-150MM

Dimensions

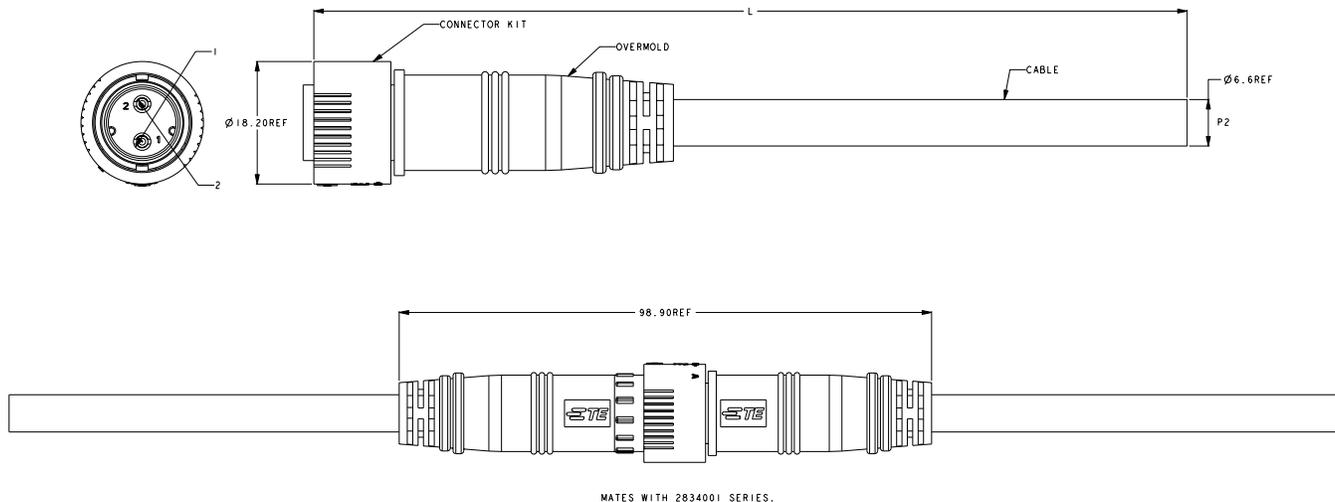

te.com

© 2016 TE Connectivity Ltd. Family of Companies. All Rights Reserved. TE, TE Connectivity, and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, product and Company names mentioned herein may be trademarks of their respective owners.  
1-1773883-9 JN 6/2016

USA: +1 (800) 522-6752  
Canada: +1 (905) 475-6222  
Mexico: +52 (0) 55-1106-0800  
Latin/S. America: +54 (0) 11-4733-2200  
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666  
France: +33 (0) 1-3420-8686  
The Netherlands: +31 (0) 73-6246-999  
China: +86 (0) 400-820-6015

